




Portable Power Station

Ideal portable emergency power for outdoor camping and home use.

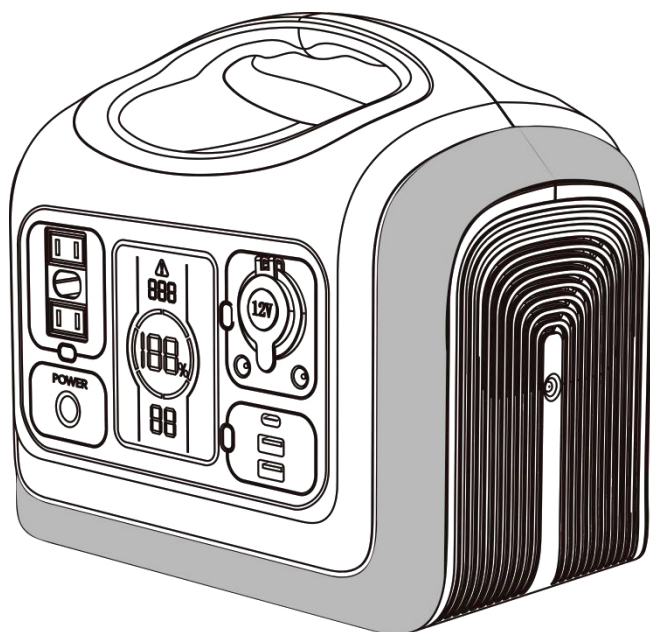

100~120V&220~240V

User Manual

Content

- 1. Disclaimer ----- 1**
- 2. Product List ----- 1-2**
- 3. Function Instructions ----- 2-5**
 - 3.1 Function Description ----- 2-4**
 - 3.2 LCD Screen Description ----- 5**
- 4. Direction of Use ----- 5-13**
 - 4.1 Five Different Recharge ways ----- 6-10**
 - 4.1.1. Wall Socket with Standard Adapter ----- 6-7**
 - 4.1.2. USB-C Charger ----- 7-8**
 - 4.1.3. Car Charger ----- 8**
 - 4.1.4. Solar Panel Charger----- 9**
 - 4.1.5. Adapter+USB-C ----- 10**
 - 4.2 Discharge Output Instructions----- 11**
- Main Power Switch Instructions----- 11**

4.2.1 AC Output Instructions ----- 12

4.2.2 DC 5521 port & Car Charge Output Instructions ----- 12

4.2.3 USB-C&USB-A Output Instructions ----- 12

4.3 LED Light Instructions----- 13

5. Appliances Run Time Instructions ----- 14

6. Storage & Maintenance ----- 15

7. Main Technical Specification ----- 16-17


8. Fault Code and Trouble Shooting ----- 18

1. Disclaimer

- 1. The Company is not responsible for any damage caused by force majeure (e.g. fire, typhoon, flood, earthquake or customer's negligence, abuse or use in other unusual circumstances).
- 2.The Company is not responsible for the loss caused by the use of non-standard connectors.
- 3.The Company is not responsible for any damage caused by the wrong operation which didn't follow the instructions of user manual.


2. Product List



No.	Items	Qty.
1	Portable Power Station	1
2	AC Adapter	1
3	7909 connected wire for Vehicle's 12V Output	1
4	User Manual	1
5	Warranty Card	1

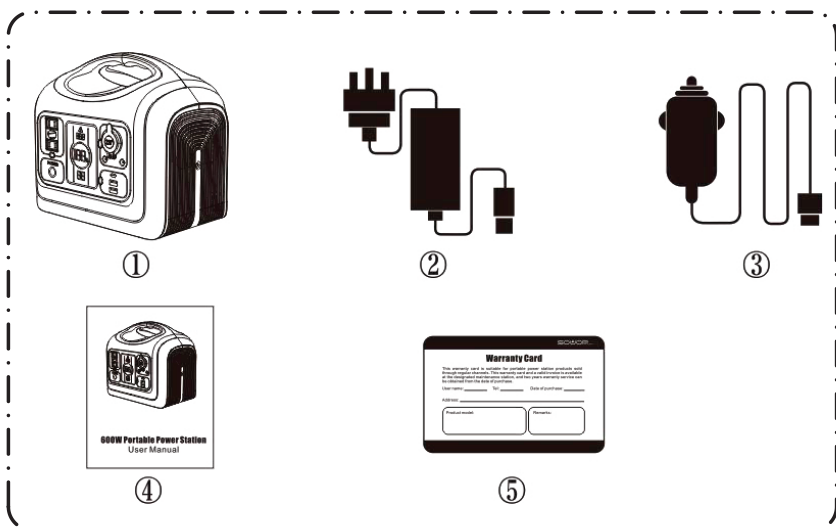

3. Function Instructions

3.1 Function Description

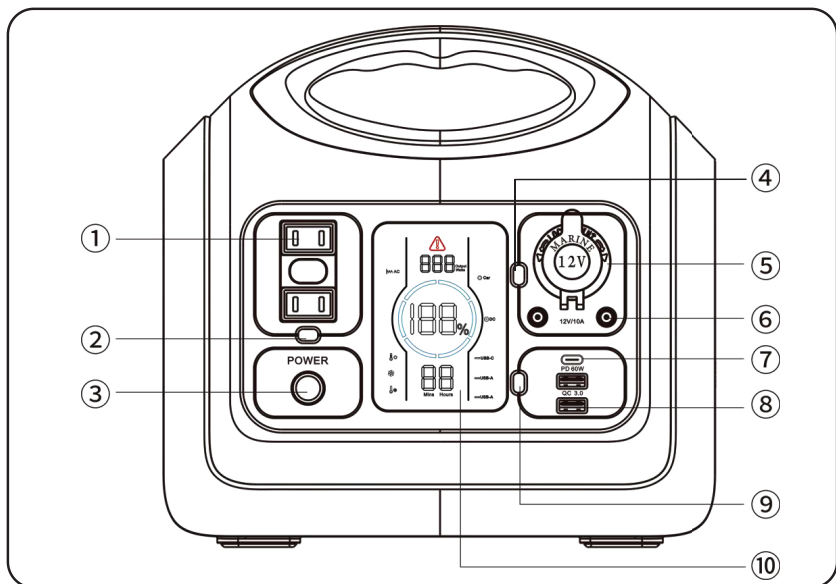

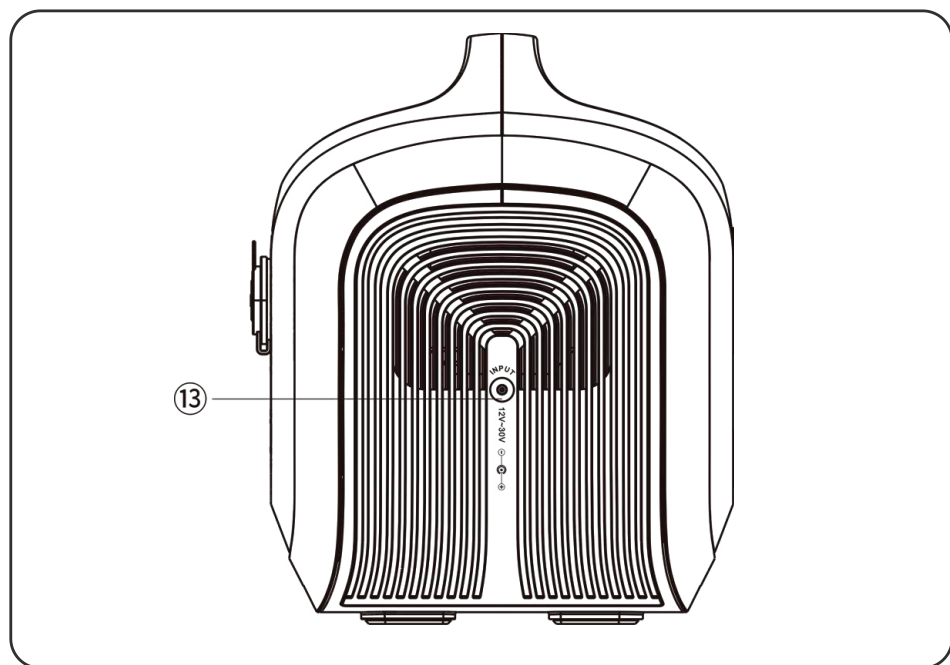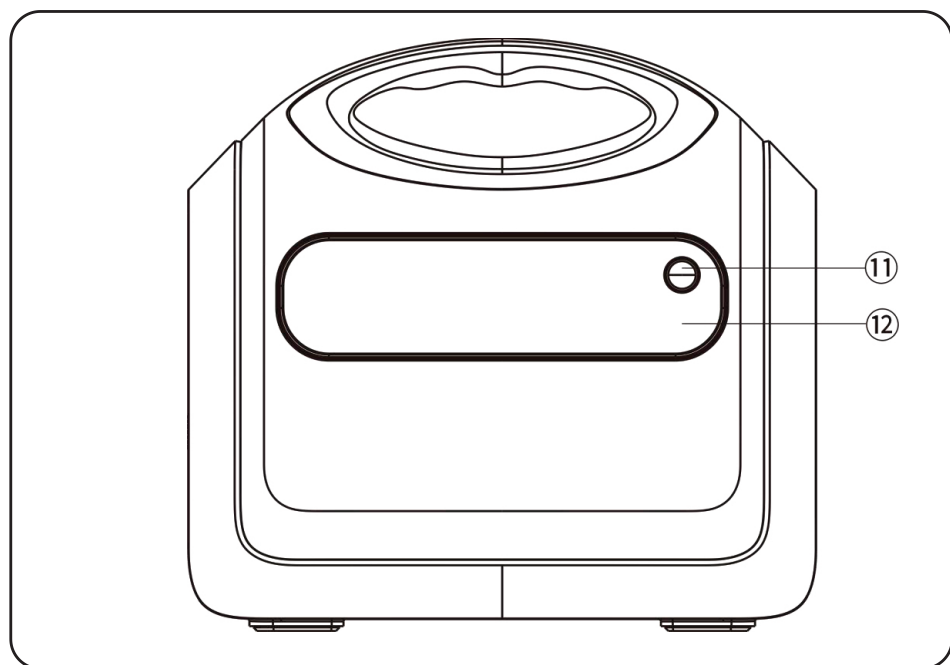

1.AC Output Port

2.AC Output Power On/Off Switch

3.Main Power On/Off Switch

4.Car Charger and DC5521 Output Ports Power On/Off Switch

5.12V Car Charger Output Port

6.12V DC5521 Output Port

7.USB-C Input & Output Port

8.USB-A Output Port

9.USB-C & USB-A Output Power On/Off Switch


10.LCD Screen

11.LED Light Power On/Off Switch

12. LED Light

13.7909 Recharging Input Port

3.2 LCD Screen Description

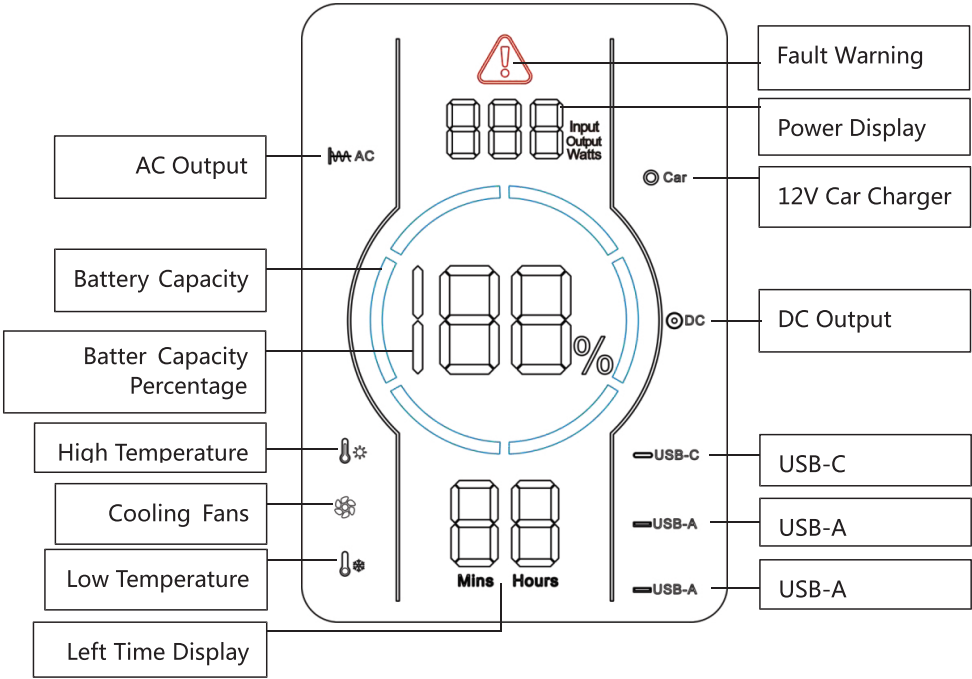

4. Direction of Use

The LCD Battery Capacity Ring indicates the left capacity. The ring has been divided into 6 equal segments, accounting for about 17%~35%~51%~68%~85%~100%. When discharging, the blue segments of the ring will disappear according to the real-time left capacity. When recharging, the blue ring will be

flashed clockwise along the trajectory, and the digital number will show you the real-time input charging power. After full charge, the whole blue ring will light up and remain stable. After charging, please unplug the adapter.

CAUTION


- There will be efficiency loss of the input power which displays on the LCD screen.
- Please charge the Product at the ambient temperature of 0-45℃.
- Must make sure that the connection is in good contact , and adapter work normally, otherwise, it may cause potential safety hazards.
- In order to reduce the power consumption and prolong the battery lifetime of the Product, please turn off all the switches when it is not in use.

4.1 5 Different Recharging Ways

4.1.1 Standard AC Adapter


Please connect the 7909 input charge port of the Product and wall outlet with our standard 100W AC Adapter , it will take about 7.5

hours to full charge.

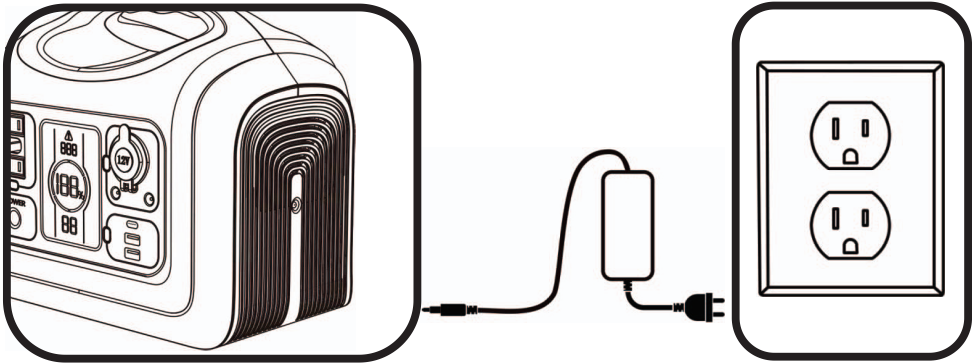

4.1.2 USB-C Charger

Please connect the USB-C port of the Product and wall outlet with USB-C charger which support the PD communication protocol, it will take at least 10 hours to full charge, depending on the input power of USB-C charger.

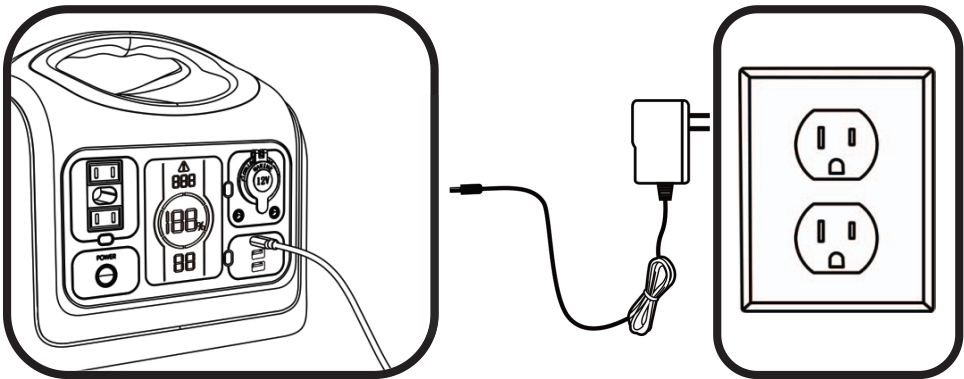


CAUTION

The max. input power of USB-C charging is 60W.

4.1.3 Car Charger

Please connect the input 7909 charging port and the vehicle's 12V cigarette output port with our standard 7909 transfer cables. It will take at least 8 hours to full charge.

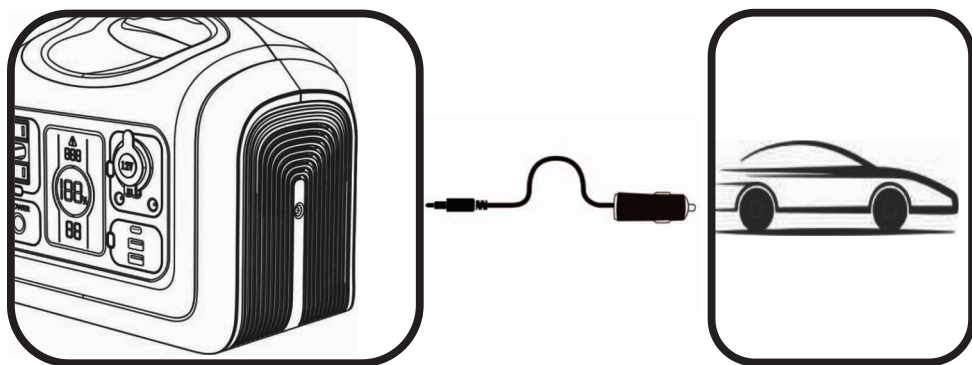


CAUTION

The max input power of car charging is 78W.

4.1.4 Solar Panels

Please connect the output cable of 100W solar panels and the 7909 input charging port. It will take at least 8 hours to full charge, depending on the light of the sun.

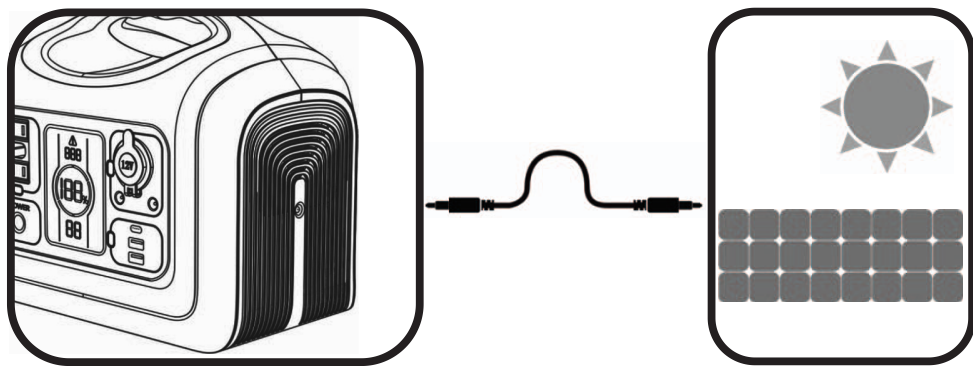


CAUTION

In order to get maximum solar conversion efficiency, please keep the solar panels at a vertical angle to the sun's rays.

4.1.5 Adapter+USB-C

Adapter and USB-C charging can be worked together to shorten the charging time. In this way, 3.5 hours can be charged to 80%, and 5 hours to 100%.

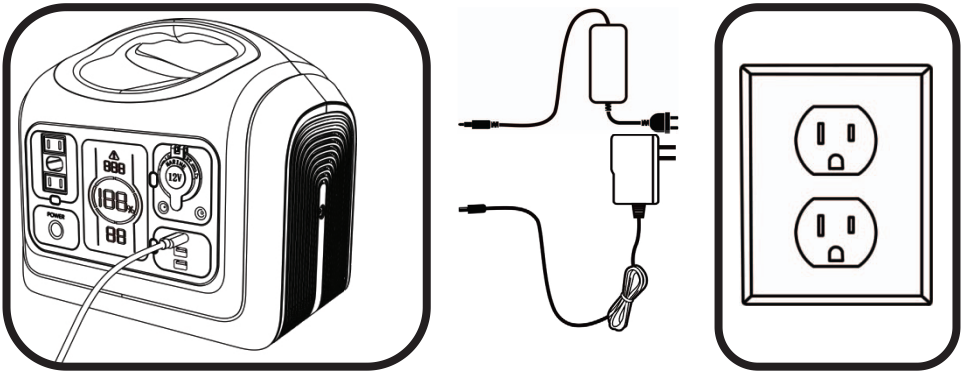

CAUTION


The max. total input power is 160W.

4.2 AC Output Instructions

Main Power Switch

POWER ON: Long press the main power button for 2 seconds, the background light around the button will lit up , and the LCD screen will light up too, the blue battery ring and battery percentage will display.

POWER OFF: Long press the main power button for 2 seconds, the background light and LCD screen will be off at the same time.

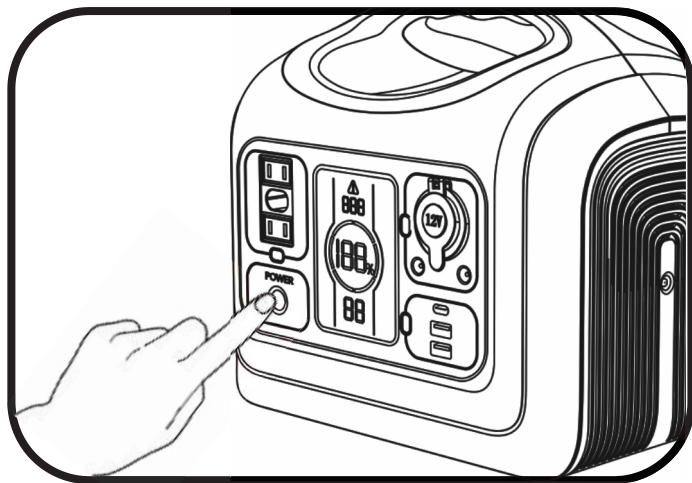

4.2.1 AC Output Instructions

When the main power button is turned on, gently press the AC Output button ②, the icon  in the LCD screen will lit up. It means the function of this area can be used normally. Press this button again, the icon  will disappear, and the function of this area will stop working.

4.2.2 DC5521& Car Charger Output Instructions


When the main power button is turned on, gently press the Car Charger and DC5521 Output button ④, the icons  and  in LCD screen will lit up. It means the function of this area can be used normally. Press this button again, the icons will disappear, and the function of this area will stop working.

4.2.3 USB-C&USB-A Output Instructions

When the main power button is turned on, gently press USB-C& USB-A Output button ⑨, the icons  and  in LCD screen will lit up. It means the function of this area can be used normally. Press this button again, the icons will disappear, and the function of this area will stop working.

4.3 LED Light Instructions

LED light is not under the control of main power button. The power on/off button is on the other side. Press once, 50% brightness, press again, 100% brightness, then press again, it will change to SOS flashing mode, and press once more to power off.

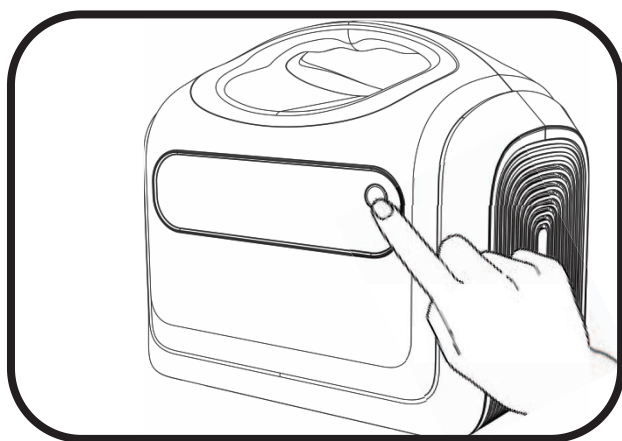

5. Appliances Run Time Instructions

Icons	Appliances	Run time
	3110mAh phone	42 times
	30Wh Tablet PC	8 times
	60Wh Laptop	17 times
	10W Light	50.5 hours
	16Wh Camera	31 times
	60Wh Drone	8 times
	50W Mini Cooler	10 hours
	30W Fanner	17 hours
	30Wh Electric Tool	17 times
	10W WIFI	16.8 hours
	110W TV	4.6 hours
	40W Ventilator	12.6 hours

6. Storage and Maintenance

- When the device is not in use, please turn off all switches to reduce product power consumption and prolong the product battery lifetime;
- Please keep the surface of the product clean, ensure that the product does not contact gasoline, volatile oil, thinner, kerosene, etc., to avoid corrosion of the product shell;
- Please store the product in a dry, ventilated and dustless environment. Storage temperature range in 0~40°C, avoid direct sunlight;
- Please fully charged the battery before storage, and charge it at least once every 6 months, to avoid dormancy of the battery, which will affect normal use;
- If the product needs to be transported long distance, please Keep the battery power between 40%~60%, otherwise there will be potential safety risks.

7. Main Technical Specification

Output Technical Parameters		
AC Output	Rated Voltage	100~120Vac/220~240Vac
	Rated Power	600W
	Peak Power	1000W
	Frequency	50/60Hz
DC 12V & Car lighter Output	Rated Voltage	12V
	Rated Power	10A
USB-A Output	5V/3A; 9V/2A; 12V/1.5A (18W Max)	
USB-C Output	5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3A (60W Max)	
LED Light	Press once, 50% brightness, press again, 100% brightness, then press again, it will change to SOS flashing mode, and press once more to power off.	
Input		
Input Voltage	12V~30V	
AC7909 Input Power	100W Max	
USB-C Input Power	60W Max	


Battery	
Rated Capacity	595.2 Wh
Rated Voltage	19.2 Vac
Battery Type	LiFePO ₄
Common Information	
IP Grade	IP21
Working Temperature	0~40℃
Dimensions	10.5 x 7.76 x 9.73 in (27 x 20 x 25 cm)
Net Weight	15 lbs (6.8 kg)

8. Fault Code and Trouble Shooting

Code	Description	Performance	Trouble Shooting
E00	AC Short Circuit Protection	 AC +  flashing, no output	Press the AC Output Power on/off button for recovery.
E01	Over Load Production	 AC +  DC +  flashing, no output	Flashing icons indicates which circuit overload. Press corresponding button for recovery.
E02	Battery Low Voltage Protection	Related function icons flashing , Corresponding terminals no output	Press corresponding button for recovery.
E03	AC&DC Output run simultaneously, system overload	 AC flashing, AC no output	AC&DC Output run at the same time, the total load power is over 600W. Shut down the AC output, or lower down the load of AC output,priority support the DC output.
E04	Inverter fault	 AC +  flashing, no output	Inverter output voltage too high/low; Inverter over temperature; DC main line voltage too high/low; Loaded current abnormal.
E05	BMS fault	 flashing, other function icons Can't lit up, no output	Charge over voltage protection; Discharge under voltage protection; High Temperature Protection; Low Temperature Protection; Short Circuit Protection.



600W ポータブル電源

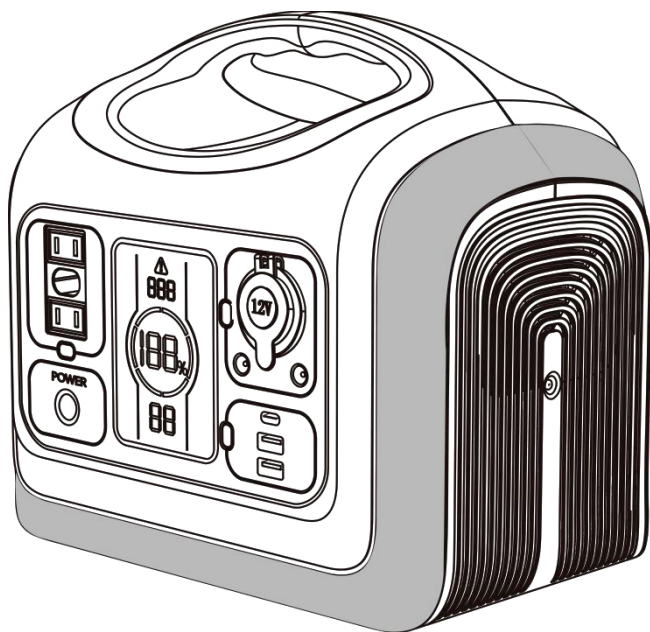

取扱説明書

このたびは OUPES 製品をお買い上げいただき、誠にありがとうございます。

◆取扱説明書をよくお読みのうえ、正しく安全にお使いください。

◆使用前に「安全上のご注意」を必ずお読みください。

目次

安全上のご注意

1.梱包明細	-----	2
2.機能説明	-----	3-5
3.LCD ディスプレイ	-----	5--6
4.充電について	-----	6-9
5.ボタンの使い方	-----	10-11
6.電源周波数の切替える手順 (出荷設定 : 60Hz)	-----	12
7.電気製品の使用参考回数	-----	13
8.製品仕様	-----	14-15
9.免責事項	-----	16
10.よくある故障と対処方法	-----	17
11.お問い合わせ	-----	18

安全上のご注意


使用及び保管環境は製品寿命、パフォーマンスと信頼性に影響を与える可能性がありますので、下記の注意事項をお守りください。

- (1) 保管する時は、フル充電にしてください。
- (2) 全ての電源ボタンをオフにして保管してください。
- (3) 電池の寿命を長持ちさせるには、最低でも半年 1 回、満充電表示まで充電してください。
- (4) 換気が良い場所に保管してください。水、可燃性ガス、腐食性物質、金属粉塵のある場所では絶対に使用しないでください。保管環境が良くない場合、火災、故障の原因となります。
- (5) 水につけたり、水をかけたりしないでください。また、水に濡れた時は絶対に使用しないでください。火災、感電、故障の原因となります。適切な温度範囲 :0℃ ~ 40℃。
- (6) 本製品が汚れた場合、乾いた布で拭いてください。
- (7) 分解や改造は絶対にしないでください。火災や感電、故障の原因となります。
- (8) 子供、ペットが届かない場所に保管してください。


1. 梱包明細


番号	名称	数量
1	ポータブル電源本体	1
2	AC アダプター (AC 充電ケーブルを含め)	1
3	シガーソケット-7909 ケーブル	1
4	取扱説明書	1
5	品質保証カード	1

- 画像はイメージです。実際の商品と異なる場合があります。

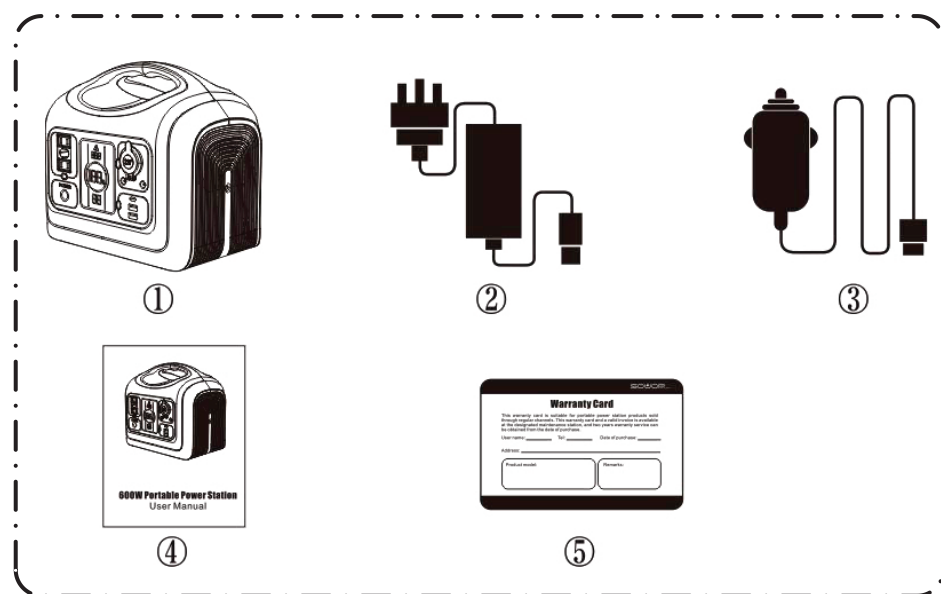

2.機能説明

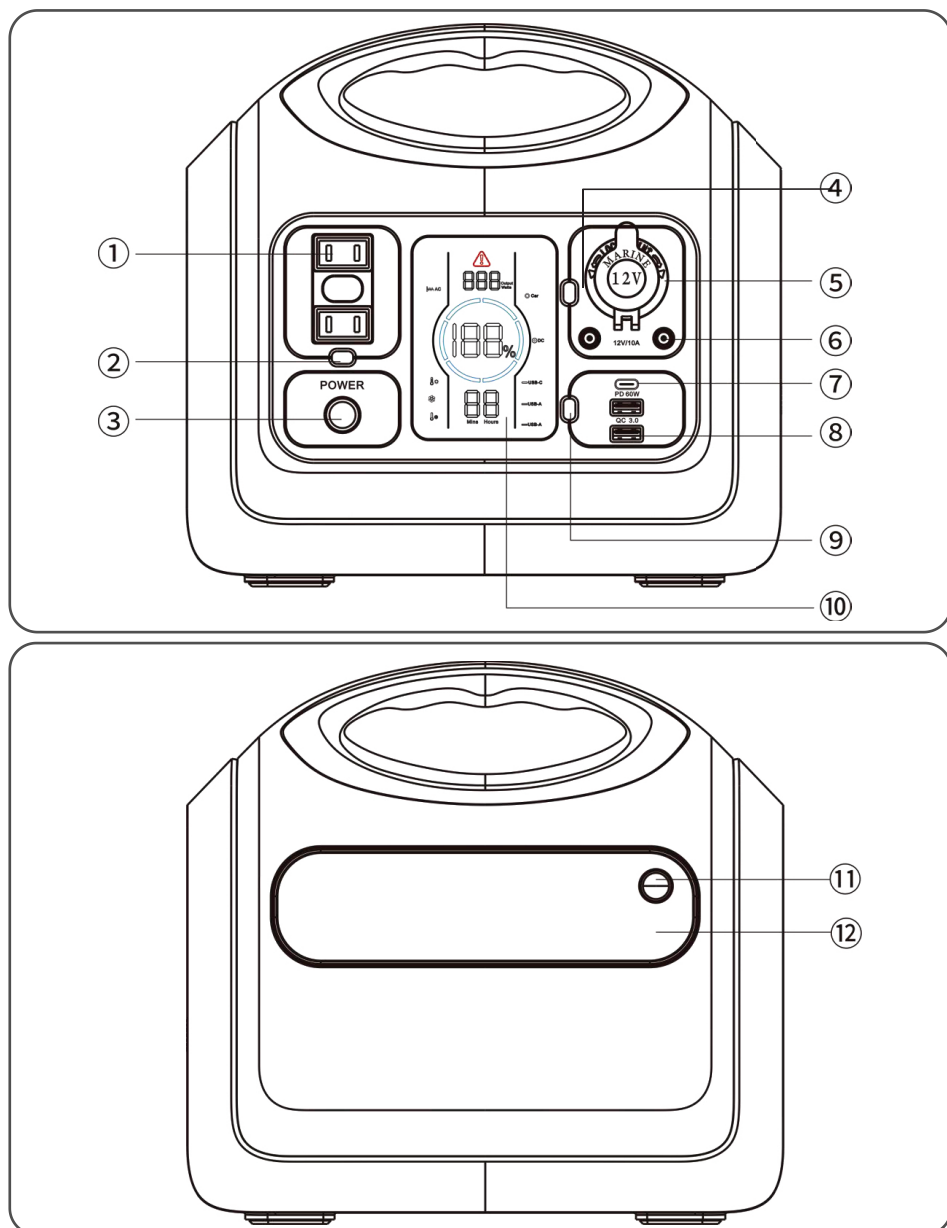

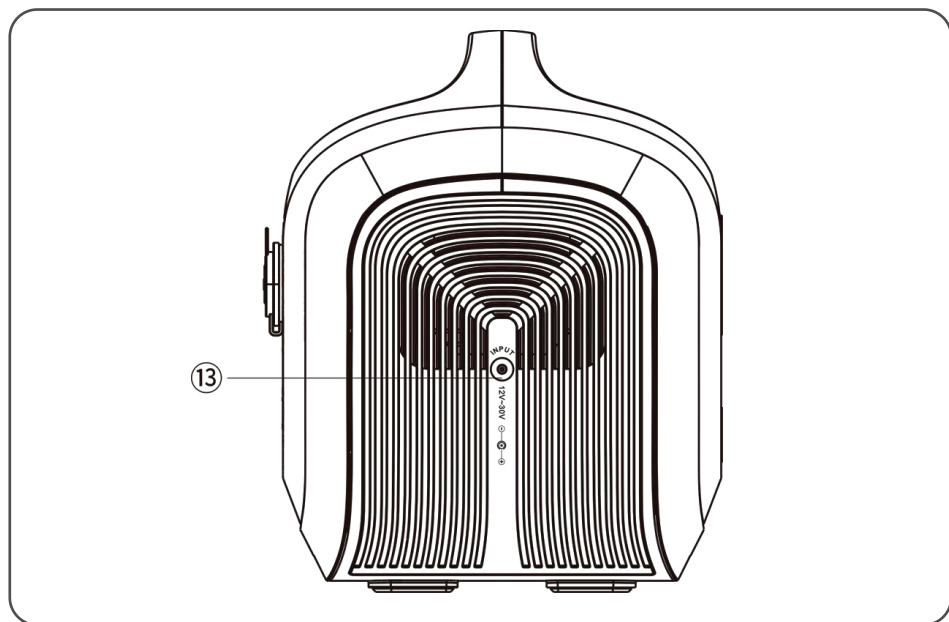

名称紹介

1.AC 出力ポート×2

2.AC 電源ボタン

3.メイン電源ボタン

4.DC 電源ボタン

5.シガーソケット（充電用）

6.DC 出力ポート×2

7.USB-C 出力ポート

8.USB-A 出力ポート×2

9.USB-A 出力電源ボタン


10.LCD ディスプレイ

11.LED ライトボタン

12.LED ライト

13.PV+AC アダプター入力ポート（充電用）

3.LCD ディスプレイ

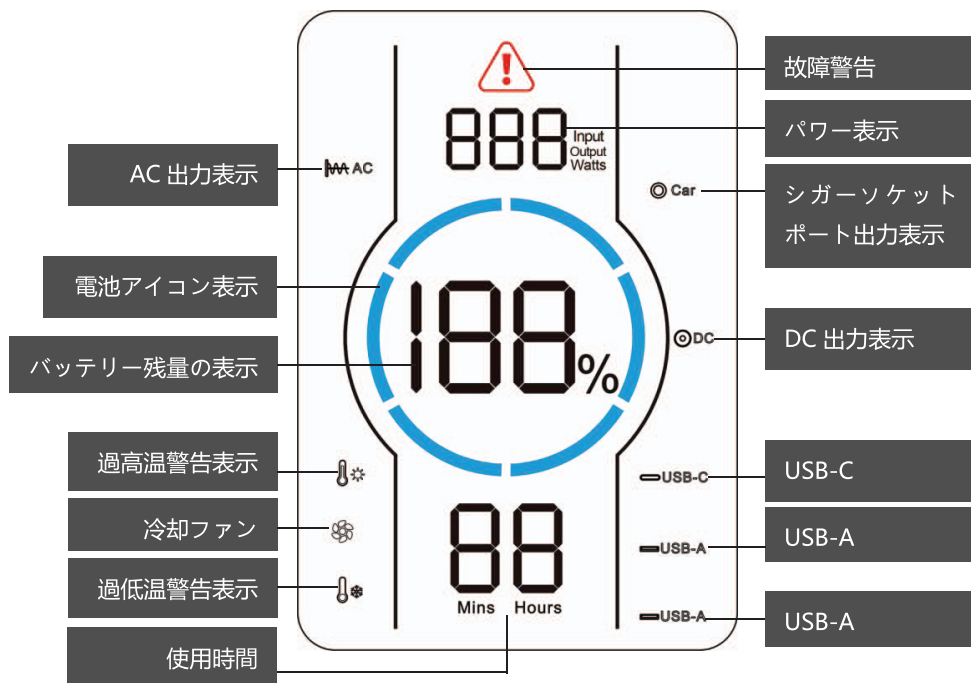


ご注意

LCD ディスプレイは充電レベルを表示します。バッテリー残量表示は 17%～35%～51%～68%～85%～100%という六段に分けられます。ご使用する際には、バッテリー残量のみ表示します。充電中、バッテリー残量セグメントは 1 秒おきに点滅します。

4.充電について——充電方法が五つがあります


充電方法 1：AC アダプターで充電

本製品付属の AC アダプターをコンセントの奥までに差し込んでください。電源ボタンを押すと充電が開始し、LCD 画面の電池アイコンからバッテリー残量をご確認できます。フル充電までおおよそ 7.5 時間がかかります。安全上のため、本製品を 0～45℃の環境温度で充電してください。

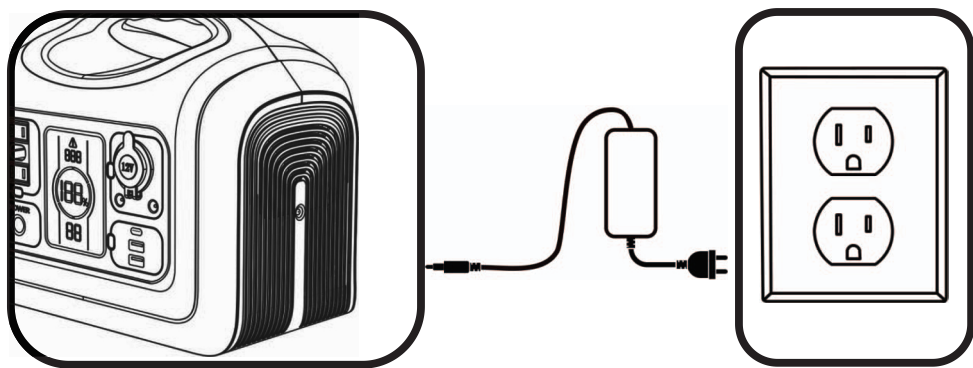

充電方法 2：シガーソケットから充電

付属のシガーソケットケーブルを充電用入力端子に差し込み、シガープラグを車のシガーソケットに接続してください。LCD ディスプレイで充電状態が表示されます。

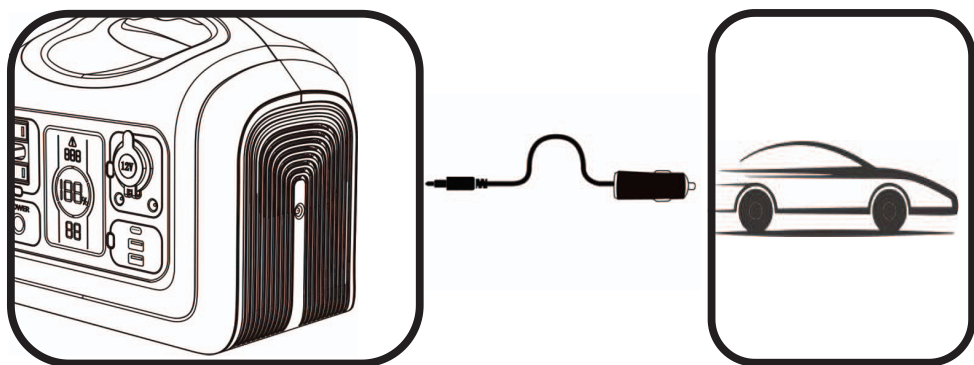

ご注意


本製品のカー充電は最大 78 W までご対応します。

充電方法 3：ソーラーパネルで充電

- お使いのソーラーパネルを直射日光に最も多く当たる所に置いてください。
- ソーラー充電ケーブルが正しく接続されていることをご確認して、製品の入力ポートにしっかりと接続してください。LCD デ


ディスプレイに充電状態をご確認できます。

- フル充電になると、内蔵式回路制御モジュールが動き、充電は自動的に中止します。

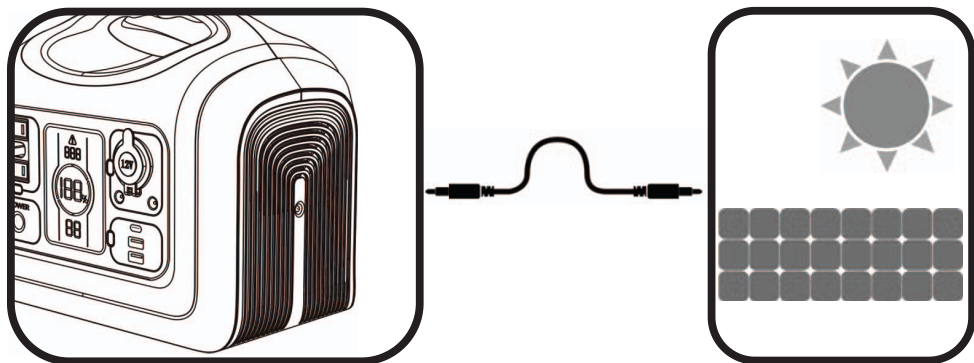

充電方法 4： USB-C ポート + USB 急速充電器

USB 急速充電器を本製品の USB-C ポートに接続してから壁のコンセントに差し込みます。製品が充電されているときは、LCD 画面の電池アイコンからバッテリーの状態をご確認できます。

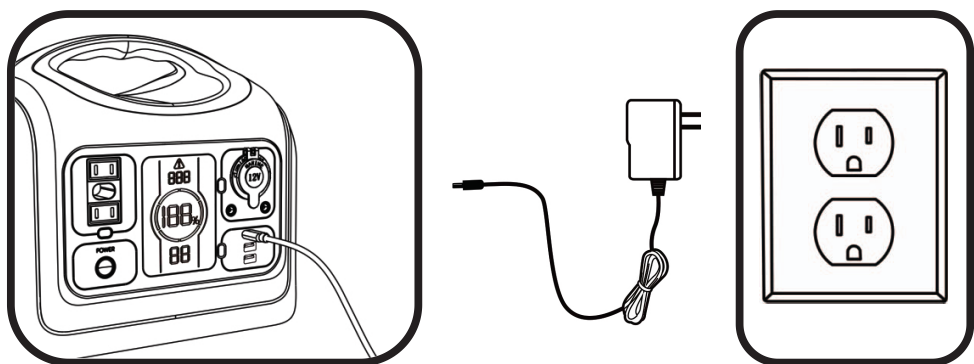


ご注意

本製品の USB-C 入力ポートは最大 60 W までご対応します。

充電方法 5 : AC アダプター+USB-C ポート

付属の AC アダプターで壁コンセントに差し込んでから、本製品の USB-C ポートにしっかりと接続すると、LCD ディスプレイに充電状態が表示されます。

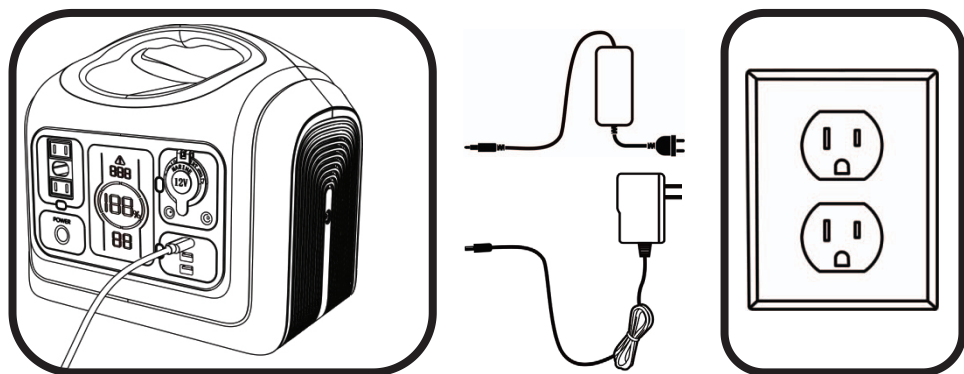

ご注意


AC アダプター+USB-C の最大電力は 160 W です。

5. ボタンの使い方

メイン電源ボタン

オン：メイン電源ボタンを 2 秒間押すと、本体を起動します。その時、LCD ディスプレイにバッテリー残量をご確認できます。

オフ：メイン電源ボタンを 2 秒間押すと、電源が切れます。

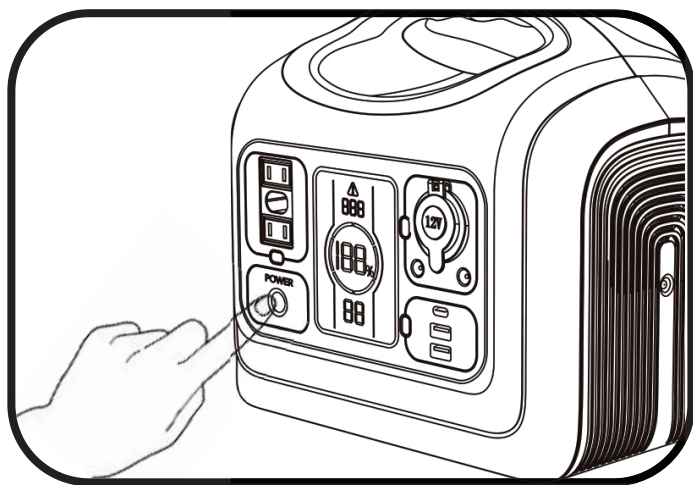

AC ボタンの使用方法

AC ボタンを押すと、AC 出力がオンになります。LCD 画面に



アイコンが点灯し、AC 機能は正常にご使用できます。

再度、AC ボタンを押すと、AC 出力がオフになります。ご対応


ランプ



が消えます。

DC ボタンの使用方法

DC ボタンを 押すと、DC 出力がオンになります。LCD 画面に



アイコンが点灯し、DC 機能は正常にご使用

できます。再度、DC ボタンを押すと、DC 出力がオフになります。

ご対応ランプ



が消えます。

USB-C&USB-A ボタンの使い方

メイン電源がオンの状態で、画面の右下のボタンを軽く押すと、

USB-C&USB-A 機能は正常にご使用できます。再度、軽く押すと


オフになります。ご対応ランプが消えます。

6.電源周波数の切替える手順

(1) ステップ 1 : メインパワーボタンを 2 秒押しして本製品を立ちあげます。 また、AC 出力が OFF の状態で、DC 電源ボタンを押してください。

(2) ステップ 2 : 電源ボタンと DC 出力ボタンを同時に押すと電源周波数の切替モードに入ります。その時、画面に当時の電源周波数 (50Hz または 60Hz) が表示されます。AC 電源ボタンを押すと、50Hz ⇄ 60Hz の間で切替します。

(3) ステップ 3 : ご希望の周波数が選択されたら、電源ボタンを長押しして選択を確定します。設定が完了したら、画面に「SUC」が表示されます。

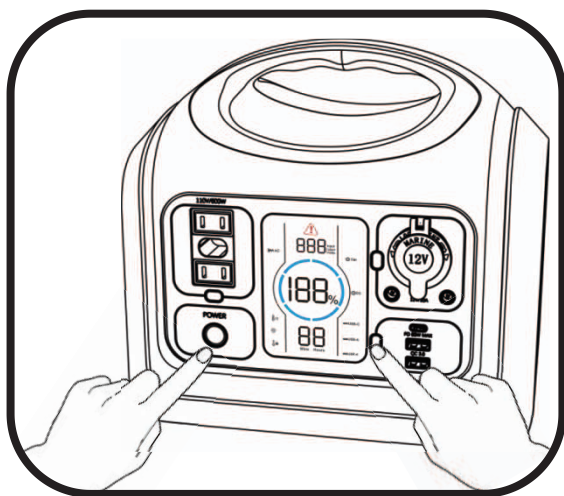

7.電気製品の使用参考回数

アイコン	設備	充電回数&使用時間
	3110mAh スマートフォン	42 回
	30Wh タブレット	8 回
	60Wh ノートパソコン	17 回
	10W LED ライト	50.5 時間
	16Wh カメラ	31 回
	60Wh ドローン	8 回
	50W ミニ冷蔵庫	10 時間
	30W 扇風機	17 時間
	30Wh 電動工具	17 回
	10W WIFI ルーター	16.8 時間
	110W テレビ	4.6 時間
	40W 呼吸器	12.6 時間

8.製品仕様

出力仕様

AC 出力	定格出力電圧	100~120Vac
	定格出力電力	600W
	ピーク出力電力	1000W
	定格周波数	50/60Hz
DC12 V&シガー ソケット出力	定格出力電圧	12V
	定格出力電流	10A
USB-A 出力	5V/3A; 9V/2A; 12V/1.5A (18W Max)	
USB-C 出力	5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3A (60W Max)	
LED ライト	非常用電源として、停電などの緊急時、照明ライトのスイッチを押せば、LED ライトが光ります。照明ライトには 3 種のモードがあります。 ・ 1 回クリック (弱) ・ 2 回クリック (強) ・ 3 回クリック (SOS) ・ 4 回クリック (ライト OFF) 。	

入力仕様	
入力電圧	12V~30V
AC 入力電力	100W Max
USB-C 入力電力	60W Max
バッテリー	
容量	595.2 Wh
定格電圧	19.2 Vac
電池コア	リン酸鉄リチウム (LiFePO_4)
製品情報	
IP 格付け	IP21
動作環境温度	0~40°C
寸法	10.5 x 7.76 x 9.73 in (27 x 20 x 25 cm)
正味重量	15 lbs (6.8 kg)

9.免責事項

- 仕様および外観は、改良のため予告なく変更されることがありますのであらかじめご了承ください。
- 火災、地震、第三者による行為、その他の事故、お客様の故意または過失・誤用・誤操作・その他の異常な条件下での使用により生じた損害に関して、当社は一切の責任を負いません。
- 非認証アクセサリのご使用により、故障の発生が当社は一切の責任を負いません。
- 取扱説明書内の注意事項を守らずに使用した事による事故や損害について、当社では一切の責任を負いません。
- 本製品は、航空宇宙機器、幹線通信機器、原子力制御機器、医療機器など、極めて高い信頼性・安全性が必要とされる用途への使用を意図しておりませんので、これらの用途には本製品の適合性をお客様において十分ご確認のうえ、ご判断ください。上記の設備又は機器に本製品を使用する場合、本製品の故障に起因する人身事故、火災事故又は機械若しくは設備の誤動作については、一切責任を負いません。

10.よくある故障と対処方法

故障コード	故障問題	故障状態	対処方法
E00	AC 短絡保護	LCD 画面に「AC+故障警告」が点滅し、出力できません。	AC電源ボタンを押して、本機を再起動してください。
E01	出力過負荷保護	画面に「AC」 + 「DC」 + 「故障警告」アイコンが点滅し、出力できません。	出力ポートが過負荷になっているかをご確認し、本機を再起動します。
E02	バッテリー低電圧保護	対応アイコンが点滅し、出力できません。	直ちに製品本体を充電してください。充電が完了すると、本機を再起動します。
E03	過電力保護（システム）	AC アイコンが点滅し、AC ポートから出力できません。	総出力電力は 600 W を超えると、過負荷になっているかをご確認し、本機を再起動します。
E04	インバータの故障	「AC」 + 「故障警告」アイコンが点滅し、出力できません。	AC 出力ポートが過負荷また短絡になっているか、インバータが過熱しているかをご確認し、本機を再起動します。
E05	BMS エラー	警告アイコンが点滅し、各機能のアイコンも点灯できなくなります。出力できません。	本機を再起動します。

上記を対処しても改善しない場合は、カスタマーサポートまでにご連絡ください。

11.お問い合わせ

弊社の製品に関するお問い合わせやご意見は、service.jp@oupes.us

まで電子メールでご送信ください。できるだけ早めにご対応申し上げます。